




Technical Data Sheet

OPUS A8 ECO Full



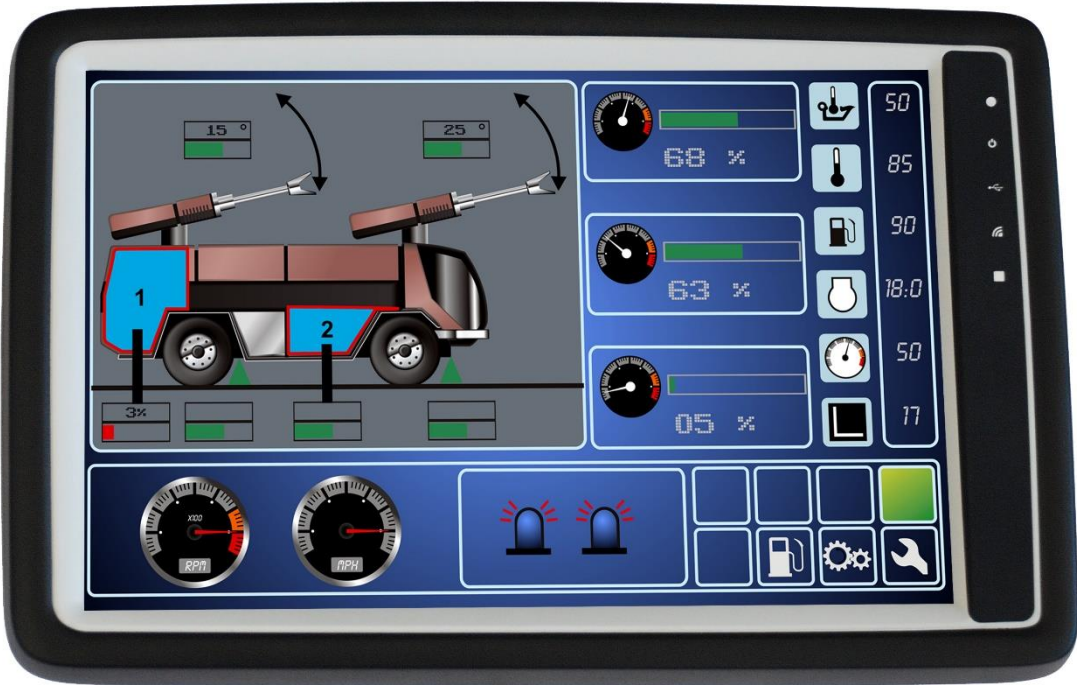

1 Notes and Warnings

Attention!

This description is not a substitution for the concerned product's documentation. Please do read the documentation including the manuals carefully before dealing with this product. If the safety instructions in the documentation are not followed dangerous situation can occur that can result in damages, injuries and/or death by high voltage or wrong handling. In case you do not have the correct documentation, you can order it by contacting **opus-support@topcon.com**. Only properly trained personnel with the correct qualification is allowed to handle the device.

Attention!

Do not open the housing to avoid danger to high voltage. Before touching the electric assemblies make sure that the electricity is switched off completely. If the front pane is broken the device needs to be taken out of service due to risk of injury. If perceivable damages on the device exist that can compromise the functionality, it must be taken out of service due to the danger of malfunctions. These particularly include damages to the LCD display, damages to the keyboard, damages that compromise the protection level and damages to the encoder knobs.

Please note:

All content is subject to change without notice. Errors and omissions excepted.

Mounting and Handling

1. Do not use the cable as a handle to carry the device.
2. Mounting in clean working environment only.
3. Do not mount the device under the use of violence because it can cause damage.
4. The device must be mounted by trained personnel only into especially designed and tested system.
5. The device may not be opened or disassembled.
6. The device is to be cleaned with a moist fuzz free cotton cloth. If necessary, a mild cleaning agent may be used. Do not use acid or abrasive cleaning agents.
7. The device is to be stored in a cool and dry environment and to be protected against sunshine.
8. If the environmental temperature is beneath 10°C the reaction time of the display increases.

2 General Information

Order numbers


This documentation is valid for OPUS A8 order numbers as follows:

OPUSA8EN1CANF000 OPUSA8EN1CDSF000 OPUSA8EN1CWVF000

OPUS Projektor
CODESYS®
CODESYS®
with WebVisu

TOPCON

Dimensions

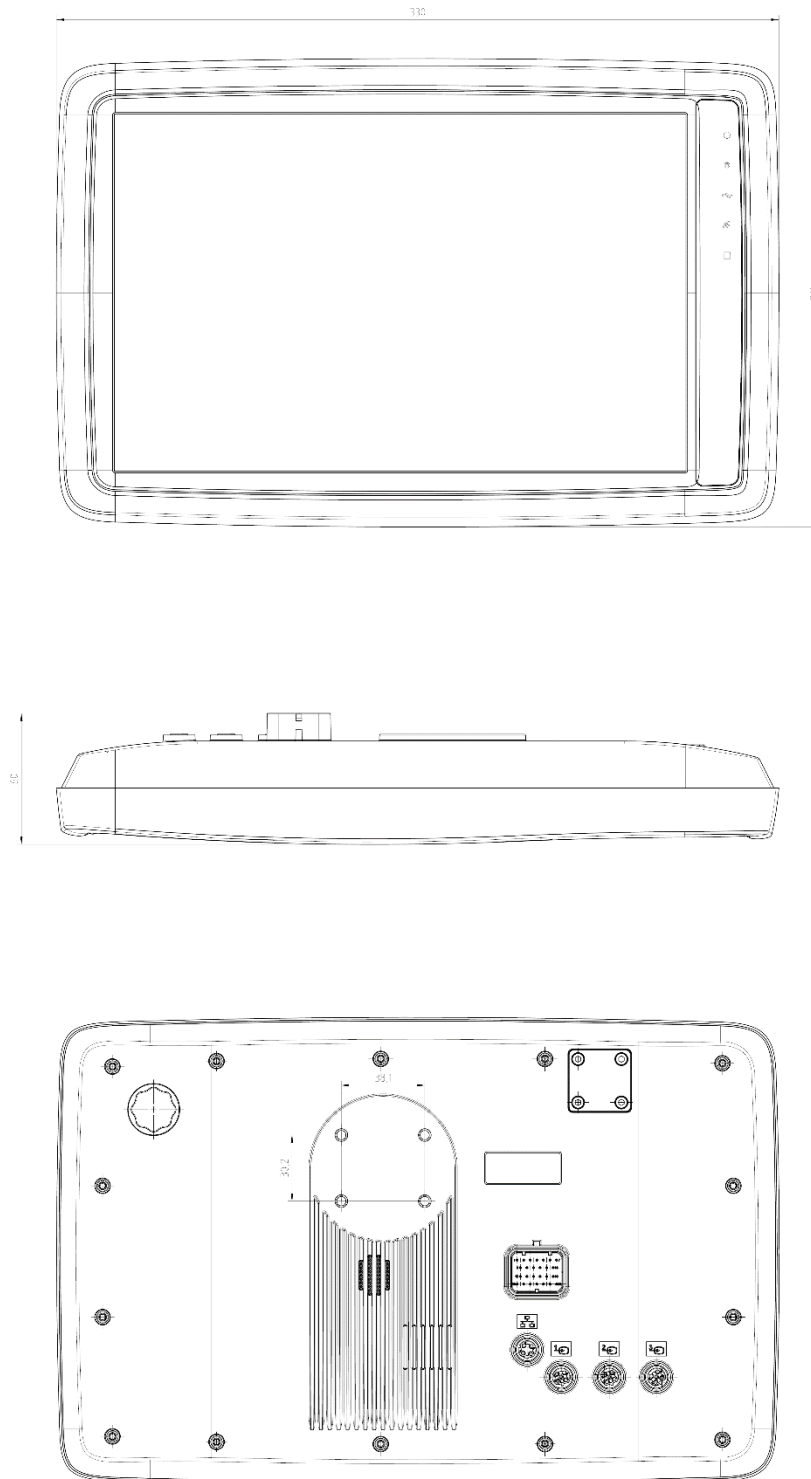

Housing

Aluminum back-housing, plastic front-housing, colored light grey (RAL 7035) with black rubber frame

Mounting

- Landscape or portrait
- Standalone



3 Display

Type:	TFT Color Graphic LCD with LED backlight	Colors:	16.7 Mio.
Size:	12.1", 261 mm (W) x 163 mm (H)	Brightness:	typ. 1000 cd/m ²
Resolution:	1280 x 800 px (WXGA), 16:10	Contrast Ratio:	typ. 750:1

4 Input Devices

Touch	PCT
Indicators and Sensors	Light sensor 1 Multicolor LED 3 Status LEDs

5 Electronics

Processor platform

CPU:	NXP I.MX6®quad, 1 GHz
Mass storage:	8 GByte (minus space for OS & application)
RAM:	1 GByte
RTC:	Buffered by gold cap

Speaker	80 dB @ 1kHz in 1 m distance
---------	------------------------------

Operating frequency range	840 Hz bis 6 kHz
---------------------------	------------------

Power supply

Operating voltage range:	9 ... 36 V DC
Protection:	Short circuit protection
Overvoltage resistance:	48 V for max. 5 min.
Inverse polarity protection:	Up to -48 V DC for max. 5 min.

Current consumption (without external load), max

Power Mode	Current at 13,5 V DC	Current At 27 V
On	≤ 1,8 A	≤ 0,7 A
Low-power	Depending on configuration	
Sleep	≤ 0,2 A	≤ 0,1 A
Off	≤ 2 mA	≤ 4 mA



6 Interfaces

CAN Bus

- 2 x CAN-Interfaces
- ISO 11898, CAN-specification 2.0B active
- Up to 1 Mbit/s (250 Kbit/s, 500 Kbit/s, 750 Kbit/s and 1 Mbit/s)

RS232

1 x RS232-Interface
 Type: EIA232 (only RXD, TXD, GND)
 Speed: max. 115 Kbps

USB 2.0

Main connector: 1 x High speed

Inputs

4 configurable analog/digital inputs
 Input impedance: > 3 kOhm
 Resolution: 12 bit (1028 digits, 1 digit ~3 mV)
 Input range: 0 ... 12 V or 4-20 mA or 0-20 mA
 Max. protectable input voltage: 36 VDC
 Protection: Short circuit protection
 Frequency: Max. signal frequency 50 Hz
 Input 1 max. signal frequency 10 kHz

Outputs

3 digital outputs
 Short circuit protection Up to 36 V
 I_{max} 300 mA open drain at 12 V
 $R_{DS, on}$ < 1 Ohm
 $R_{DS, off}$ > 100 kOhm

Audio

- 1 x Audio output (left, right, GND)
- Output power: approx. 65 mW @ 32 Ohm

Video Interface

Inputs: 3 x analog (2 live streams)
 V_{ss} : 1 V
 Camera supply: 12 VDC
 Max. current: 500 mA
 Output: 1 x camera control output (open drain) for special functionality (mirror, shutter, heating etc.)
 Ampacity 300 mA

Ethernet Interface

1 x 10/100 Mbit/s Base T

7 Connectors

Connectors

Main Typo-AMP 1437288-6
 Mating connector (customer)
 Typo-AMP 3-1437290-7
 Mating crimp contact (customer)
 Typo-AMP 3-1447221-4
 Dummy Plug (customer)
 Typo-AMP 4-1437284-3

Video M12 round connector, female,
 5-pole, B-coded, acc. To EN 61076-2-101

Ethernet M12 round connector,
 female, 4-pole, D-coded,
 acc. To EN 61076-2-101

Recommended mating connector type according to IEC 61076-2-10: MM 004-Gx1-D
 x) A, C, I, P, R or S-type

Recommended mating connector type according to IEC 61076-2-10: MM 005-Gx1-B
 x) A, C, I, P, R or S-type



8 Software

Operating System Linux Kernel 3.0.0 or higher

Application Programming • OPUS Projektor
 • CODESYS 3.x
 • C/C++

9 Testing and Verification

CE-Compliance

EU Directive 2014/30/EU (EMC) according to

- *EN ISO 13766-1: Earth-moving and building construction machinery – Electromagnetic compatibility (EMC) of machines with internal electrical power supply*
 - *EN ISO 14982: Agricultural and forestry machinery – Electromagnetic compatibility – Test methods and acceptance criteria*
-

E1 – Type approval

EU Directive ECE R 10

Protection Level (IP Code)

IP 65 and IP 66 according to *ISO 20653: Road Vehicles – Degrees of protection (IP-Code) – Protection of electrical equipment against foreign objects, water and access*

Electrical

12 and 24V-Systems according to

- *ISO 16750-2: Road Vehicles – Environmental conditions and testing for electrical and electronic equipment – Electrical Loads*
- *ISO 15003: Agricultural Engineering – Electrical and electronic equipment – Testing resistance to environmental conditions*

Mechanical

According to

- *ISO 16750-3: Road Vehicles – Environmental condition and testing for electrical and electronic equipment – Mechanical loads., Code L*
- *ISO 15003: Agricultural Engineering – Electrical and electronic equipment – Testing resistance to environmental conditions*

- Mechanical Shock: Level 2
 - Random Vibration: Level 2
 - Sinusoidal Vibration: Level 2
-

Climate

• *ISO 16750-4: Road Vehicles – Environmental conditions and testing for electrical and electronic equipment – Climatic Loads*

- Operating Temperature Range: -30 ... + 65°C
- Storage Temperature Range: -40 ... +85°C

• *ISO 15003: Agricultural Engineering – Electrical and electronic equipment – Testing resistance to environmental conditions*




10 Pinout

Main connector pinout

Pin No.	Assignment	Description
1	VCC	supply voltage +; terminal 30
2	Ignition Input	ignition input; terminal 15
3	GND	supply voltage -; terminal 31
4	CarGND	Grounding
5	AUDIO_L	Audio output, left channel
6	AUDIO_R	Audio output, right channel
7	AUDIO_GND	Audio ground
8	CAN1H	CAN 1 high
9	CAN1L	CAN 1 low
10	CAN2H	CAN 2 high
11	CAN2L	CAN 2 low
12	USB_VCC	USB +5V supply
13	USB_GND	USB supply ground
14	USB_D-	USB data -
15	USB_D+	USB data +
16	RS232 RxD	RS232 receive data
17	RS232 TxD	RS232 transmit data
18	RS232 GND	RS232 GND
19	A/DI3	Analog/digital input 3
20	A/DI1	Analog/digital input 1, full freq.
21	A/DI2	Analog/digital input 2
22	A/DI4	Analog/digital input 4
23	SERV_EN	Service enable
24	DO3	Digital output 3
25	DO1	Digital output 1
26	DO2	Digital output 2

View on rear side of the OPUS A8

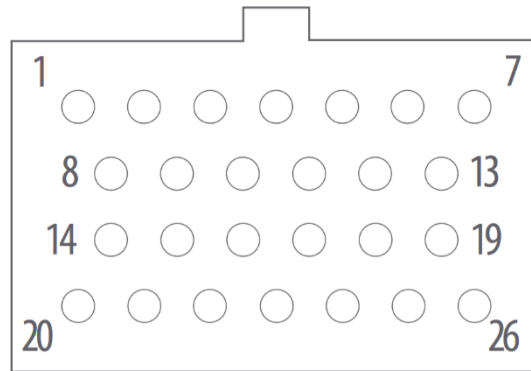

OPUS displays in the industrial sector are only intended to use with cable length less than 30 meters.

Video connector pinout



Ethernet connector pinout

Round connector, 5 pins, M12	
1	VidSig+
2	n.c.
3	Camera+
4	Camera-
5	VidSig GND

Round connector, 4 pins, M12 acc. to IEC 61076-2-101	
1	TD+
2	RD+
3	TD-
4	RD-

Video connector, M12, female, 5 pins, b-coded,
View on rear side of the OPUS A3

Ethernet connector, M12, female, 4 pins, d-coded,
view on rear side of the OPUS A3

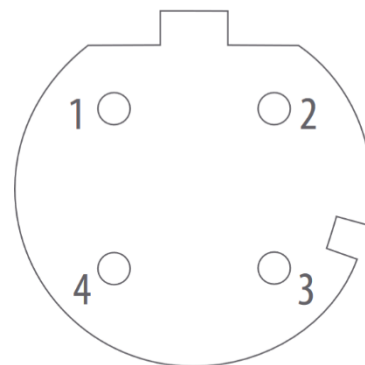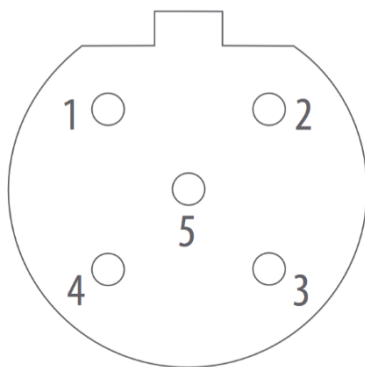

Recommended mating connector type according to IEC 61076-2-10:
MM 005-Gx1-B
x) A, C, I, P, R or S-type

Recommended mating connector type according to IEC 61076-2-10:
MM 004-Gx1-B
x) A, C, I, P, R or S-type

